


# Stein Ultra V Breader

Breading performance and flexibility

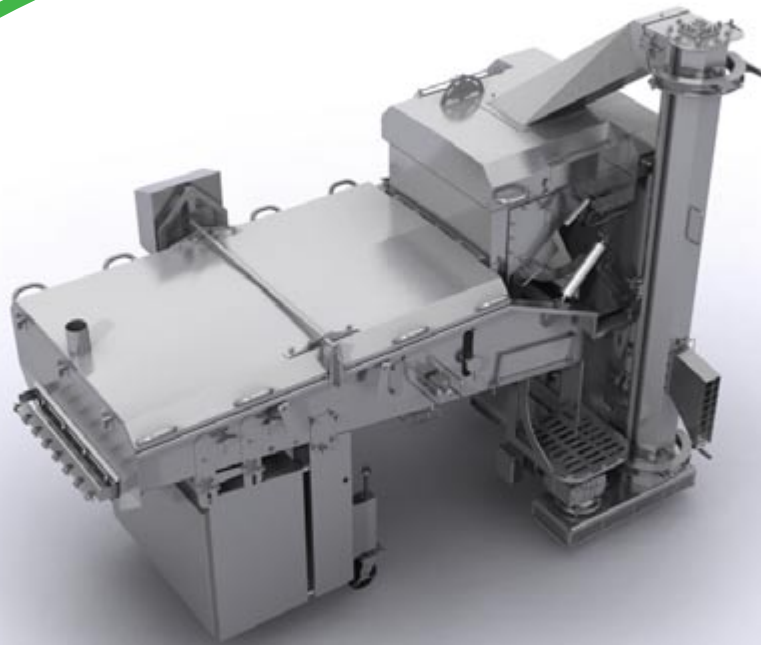

This ground-breaking breader/preduster design is the result of over 40 years of Stein experience at engineering reliable, cost-effective coating equipment.

The Stein Ultra V Breader is truly universal, handling Japanese crumbs (standard and extruded) as well as free flow breading and flour. Switching from crumb to flour requires minimal effort and can be completed in minutes. This results in a breader/preduster that offers the ultimate flexibility to a processing line.

## Benefits

- Easy to set up and easy to operate
- Controlled removal of excess breading
- Dust containment
- Quick, flexible product changeover
- Threaded caster mechanism – easy, accurate height adjustment
- Easy to clean, with minimal parts removal
- Touch-screen display (optional) to read speeds of auger and belts, and to follow operational and maintenance protocols
- Safety protocols
- Metric



The Stein Ultra V Breeder is constructed 'from the ground up' to give you reliable and hygienic heavy-duty use, while simultaneously ensuring fast, easy repeatable set-up and operation and the flexibility to handle flour and free-flow as well as Japanese Crumb breading.

## Repeatability

- All mechanical adjustments that need to be made for production on a day-to-day basis are provided with readouts in the form of graduated scales. This simple, robust mechanism ensures quick set-up and controllable repeatability over the various breading parameters such as coating pick-up and uniformity in coverage.
- Touch-screen display (optional) to read speeds of auger and belts, and to follow operational and maintenance protocols

## Hygiene and sanitation

- The entire frame is made from formed stainless steel sheet metal, completely eliminating the use of hollow structural members.
- An ergonomic hood design provides good flour dust containment, reducing airborne particulates in the plant. This not only ensures a safer working environment, but also improves overall hygiene.
- The breeder is provided with a cleaning mode, simplifying the cleaning by allowing the breeder to be powered and running with auger housing open.

We're with you right down the line™

Subject to change without notice.

B 3157-EN-0811

### North America

JBT FoodTech  
1622 First St.  
Sandusky, OH 44870  
USA  
Phone: +1 419 626 0304  
Fax: +1 419 626 9560

### Europe

JBT FoodTech  
Rusthållsgatan 21, Box 913  
SE-251 09 Helsingborg  
SWEDEN  
Phone: +46 42 490 4000  
Fax: +46 42 490 4040

### Asia

JBT FoodTech  
20 Harbour Drive  
#04-02 PSA Vista  
SINGAPORE 117612  
Phone: +65 67766 220  
Fax: +65 67766 229

### Latin America

JBT FoodTech  
Av Eng Luis Carlos Berrini, 1461  
9<sup>th</sup> Floor – Brooklin  
04571-903 Sao Paulo BRAZIL  
Phone: +55 11 3055 1010  
Fax: +55 11 3055 1030